


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

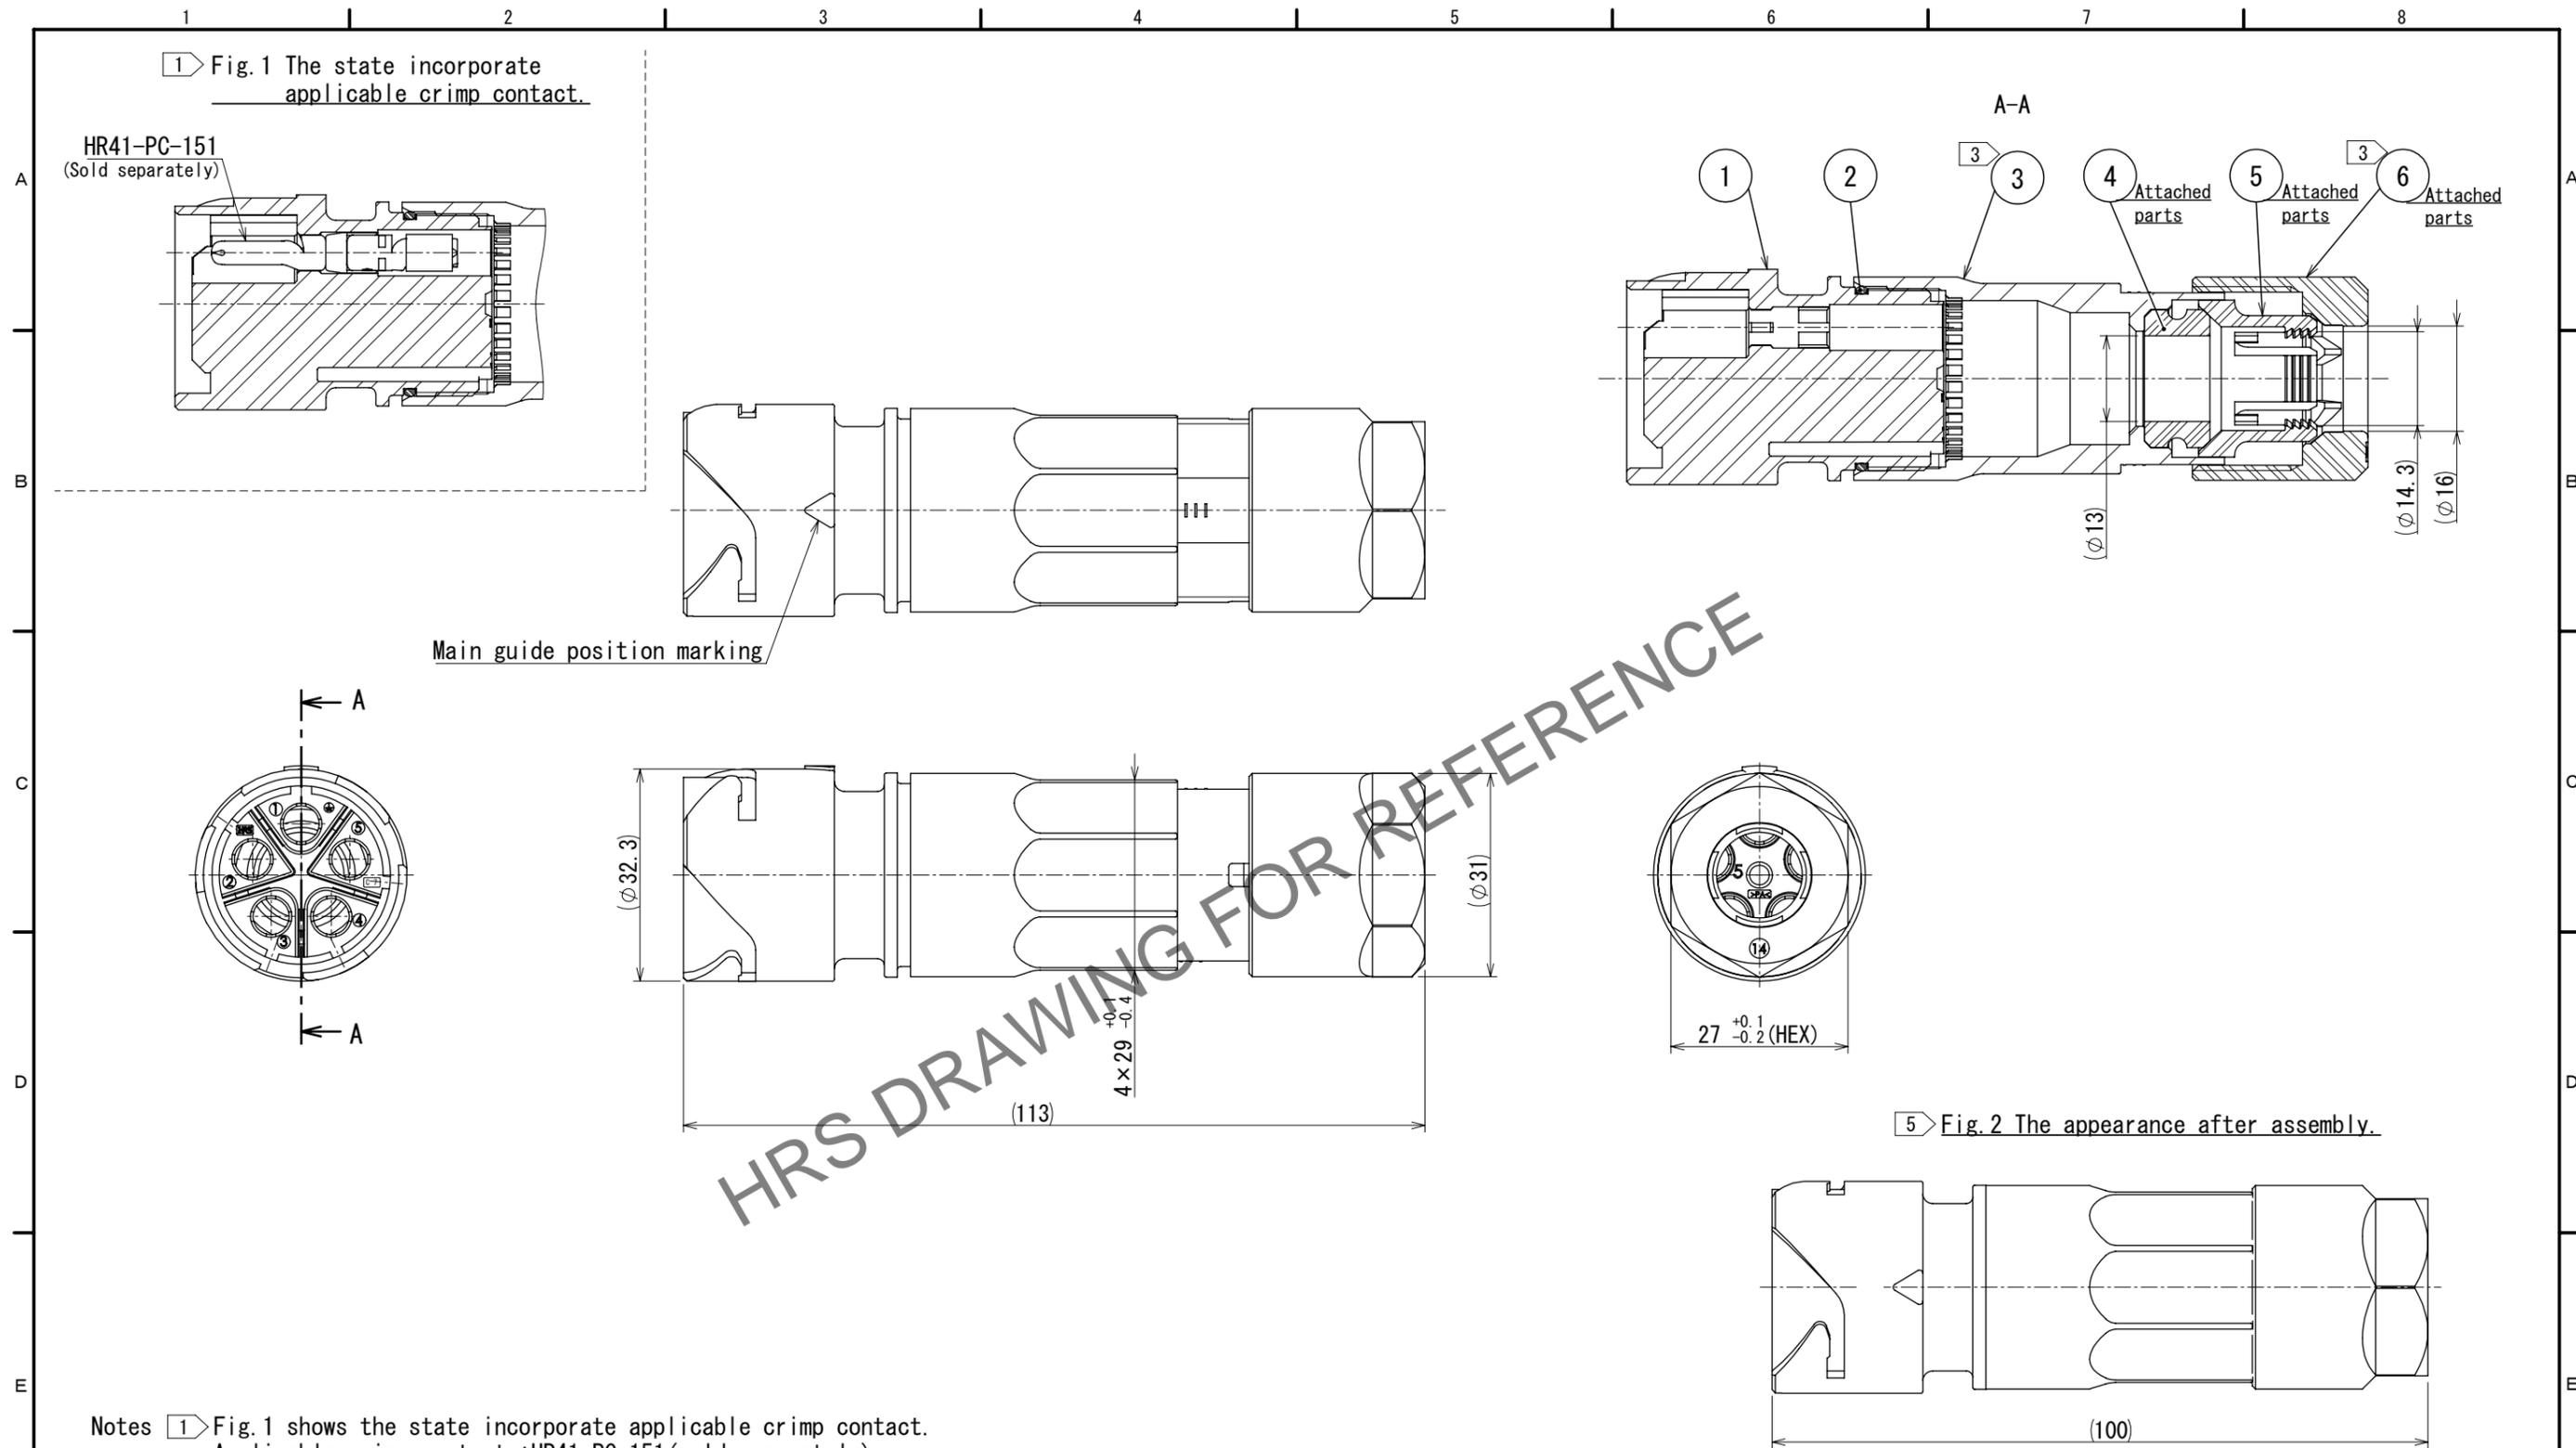

- Notes
- ① Fig.1 shows the state incorporate applicable crimp contact.  
 Applicable crimp contact :HR41-PC-151(sold separately)
  - ② Applicable crimp contact extraction tool :HR41-TP
  - ③ The recommended tightening torque of Ref.No.③ and ⑥ to be 5 to 5.5N・m  
 The adhesive for prevention of looseness is not necessary in the first time.  
 △ LOCTITE 263, LOCPRIMER 7649, HENKEL JAPAN apply to prevent Ref.No.①, ③ from loosening. After the second time.
  - ④ Rotation examples are shown for Ref.No.③ and ⑥.
  - ⑤ Fig.2 shows the appearance after assembly.
  - ⑥ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure, please confirm before the use.
  - ⑦ The assembly of this product applies to the manual ETAD-C0298.

⑤ Fig.2 The appearance after assembly.

△CAD change

3	Polyamide	(Black) UL94V-0	6	Polyamide	(Black) UL94V-0		
2	Silicone rubber	(Red)	5	Polyamide	(White) UL94V-0		
1	Polyamide	(Black) UL94V-0	4	Silicone rubber	(Red)		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS mm		SCALE 1:1		COUNT ① 2		DESCRIPTION OF REVISIONS DIS-C-00020557	
DESIGNED KN. IKEHARA		CHECKED HN. TANAKA		DATE 2025.08.08		DRAWING NO. EDC-118331-00-00	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI 2016.02.24		PART NO. HR41-25WBJG-5PC		CODE NO. CL0141-0029-6-00	
		CHECKED : HY. KOBAYASHI 2016.02.24					
		DESIGNED : HT. ZENBA 2016.02.24					
		DRAWN : HT. ZENBA 2016.02.24					