Product data sheet

Specifications

Round guard for 40mm Emergency stop, Harmony XB4, plastic, yellow, 76.2mm

ZB4BZ2105

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB5 Harmony XB4
Product or Component Type	Guard
Accessory / separate part category	Protection accessory
Accessory / separate part destination	Ø 40 mm emergency stop push-button
Color	Yellow
Quantity per Set	Set of 1

Complementary

Material	Plastic
Product Weight	0.128 lb(US) (0.058 kg)

Environment

Ambient Air Temperature for Storage	-40…185 °F (-40…85 °C)
Ambient Air Temperature for Operation	-40…158 °F (-40…70 °C)
IK degree of protection	IK05

Ordering and shipping details

Category	US10CS222469
Discount Schedule	0CS2
GTIN	785901787365
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.77 in (4.500 cm)
Package 1 Width	3.35 in (8.500 cm)
Package 1 Length	3.35 in (8.500 cm)
Package weight(Lbs)	2.046 oz (58.000 g)
Unit Type of Package 2	S03

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Number of Units in Package 2	20
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	3.422 lb(US) (1.552 kg)

Contractual warranty

Warranty	18 months

Life Is On | Schneider Electric

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	**1**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Pro-active compliance (Product out of EU RoHS legal scope)**
REACh Regulation	**REACh Declaration**
California proposition 65	**WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

Repack and remanufacture

Take-back	**No**

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
Harmony XB4

Conformity with IEC, UL, CSA, CCC EAC, and JIS standards, as well as CE marking and marine approvals
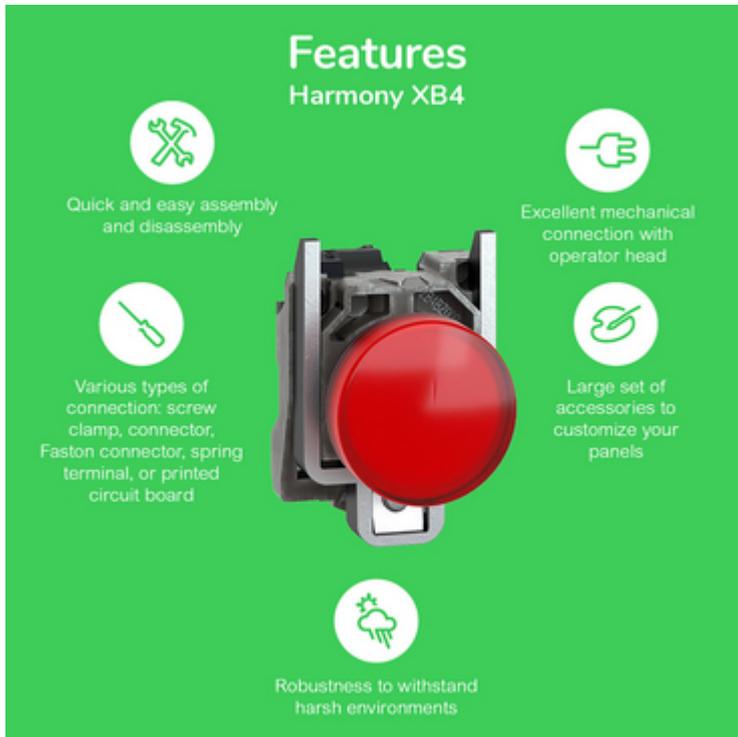
Up to IP66, 67, 69, 69K, and type 4X protection ratings

High vibration resistance with shake-proof terminal screws

Operating temperature from -40°C –to 70°C

Shock protection level up to IK06

Secure switching of inductive or heavy DC loads directly – 100 000 operations at 10A, 24V dc

Offer Marketing Illustration

Product benefits / Features

Features
Harmony XB4

Quick and easy assembly and disassembly

Excellent mechanical connection with operator head

Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board

Large set of accessories to customize your panels

Robustness to withstand harsh environments

Image of product / Alternate images

Alternative