

Sales Outline Drawing

Specifications:

May not be suitable for all Medical and Aerospace applications.
Contact Mallory Sonalert to discuss your application.

Panel Hole (mm)	19 mm
Switch Rated Voltage (VDC / VAC)	36 / 250
Switch Rated Current (A) DC / AC	5 / 5
LED Rated Voltage (VDC)	10.8 - 13.2
LED Rated Current (mA)	≤20
Button Color	Red
Switch Function	ON-MOM
Circuit	SPDT 1NO1NC
Storage & Operating Temperature	-25 °C to +85 °C
Ingress Protection Rating	IP65
Shock Resistance	IK08
Certifications	UL, cUL listed under Series FLM19-FJ-1
Material, Base	PC Plastic
Material, Body	304 Stainless Steel
Material, Button	304 Stainless Steel
Material, Pin	H62 Brass
Material, Contact	Silver contact point
Termination Type	Solder Lugs

RoHS Compliant




Part Number:

FPM19-HJ1-S1Z5R12*


* NOTES LED COLOR & VDC

- R RED
- G GREEN
- B BLUE
- Y YELLOW
- W WHITE
- BLANK CLEAR

Dimensions (mm):

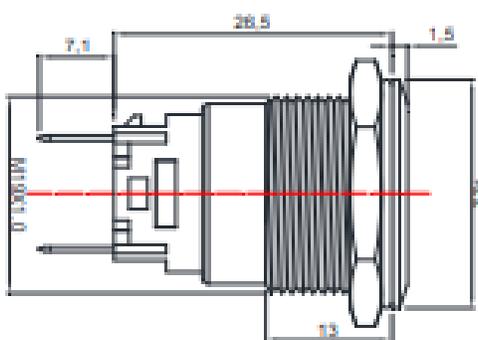

CONNECTION DIAGRAM:



PANEL HOLE:

