



In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Jan. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	RE-F-06522	J.M.M.	199.08.24						
1	RE-F-06759	J.M.M.	100.01.12						
1	RE-F-06801	J.M.Y.	00.02.16						

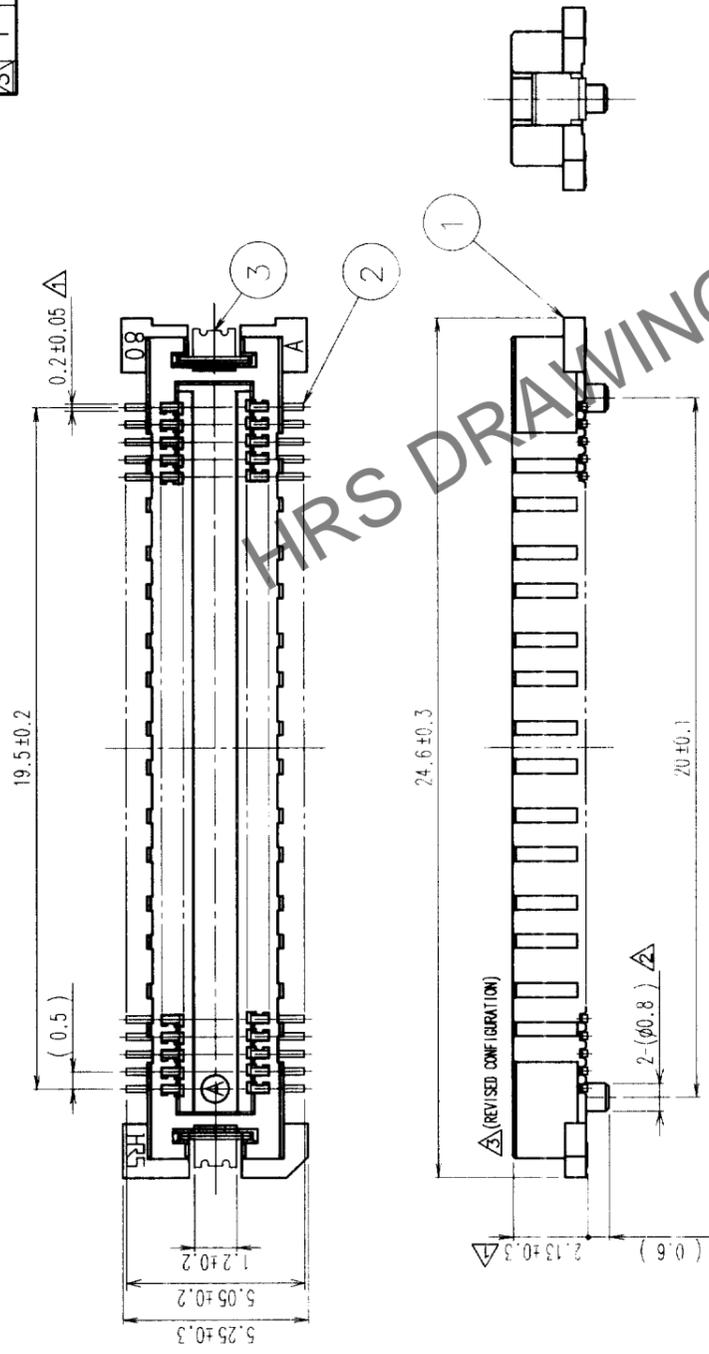

RECOMMENDED LAND PATTERN DIMENSION OF PCB

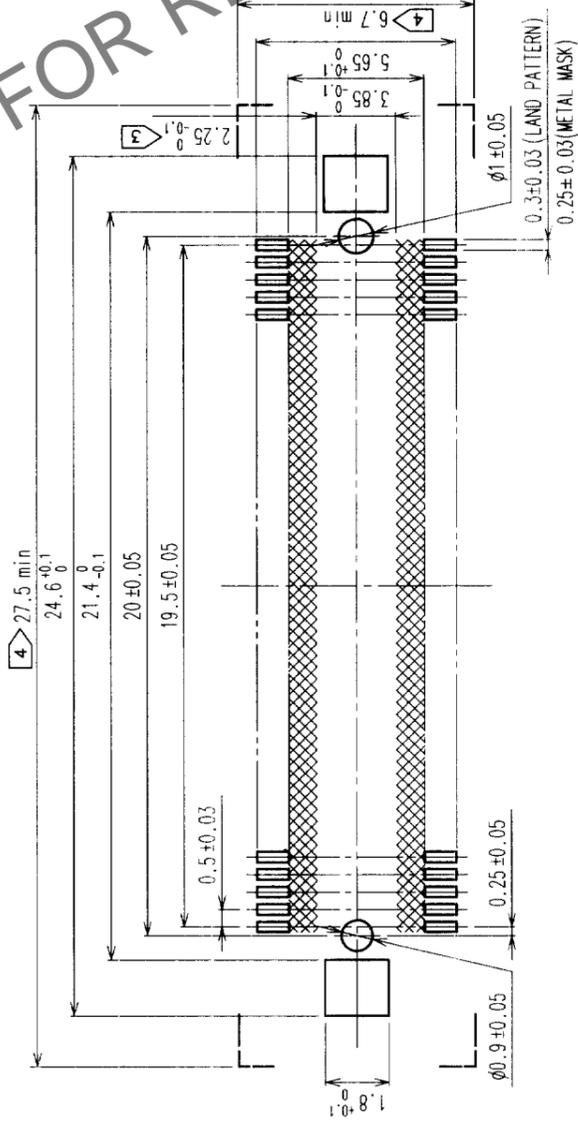

SIGNAL PORTION CROSS SECTION (10:1)

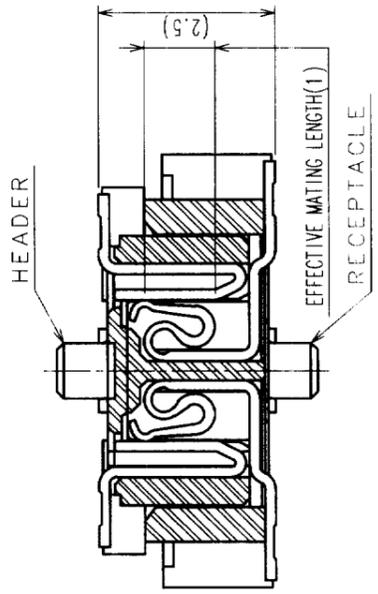

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL
1	LCP	BEIGE UL94V-0
NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL	
		DRAWN
		DESIGNED
		CHECKED
		APPROVED
		RELEASED

3	PHOSPHOR BRONZE	TIN PLATED
NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL	
		DRAWN
		DESIGNED
		CHECKED
		APPROVED
		RELEASED

DRAWING NO.	EDC3-152439	PART NO.	FX11A-80P-SV
SCALE	5 : 1	CODE NO.	CL573-0548-0
UNITS	mm		

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.

TO	
PCK	