

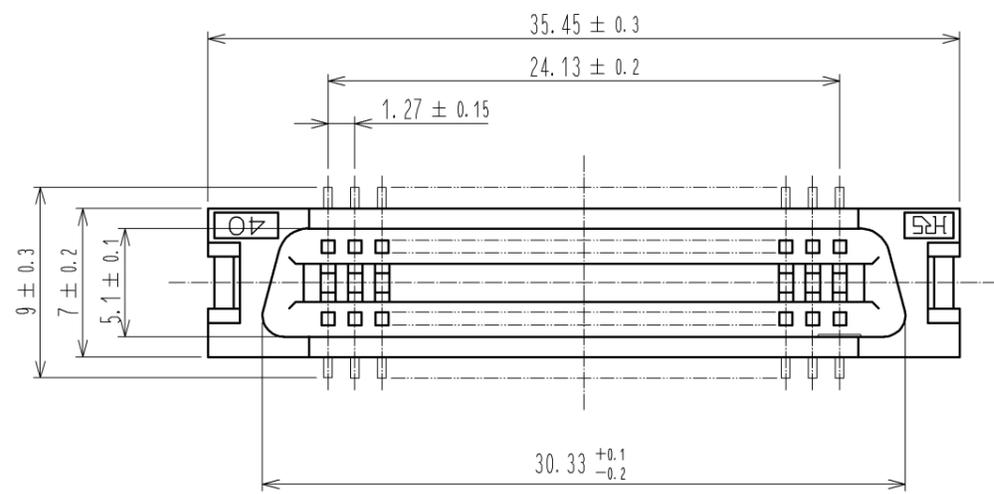
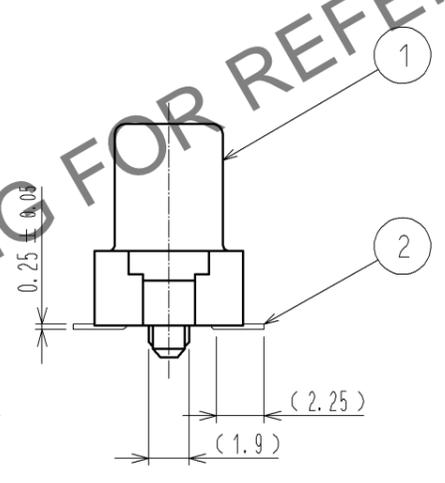


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

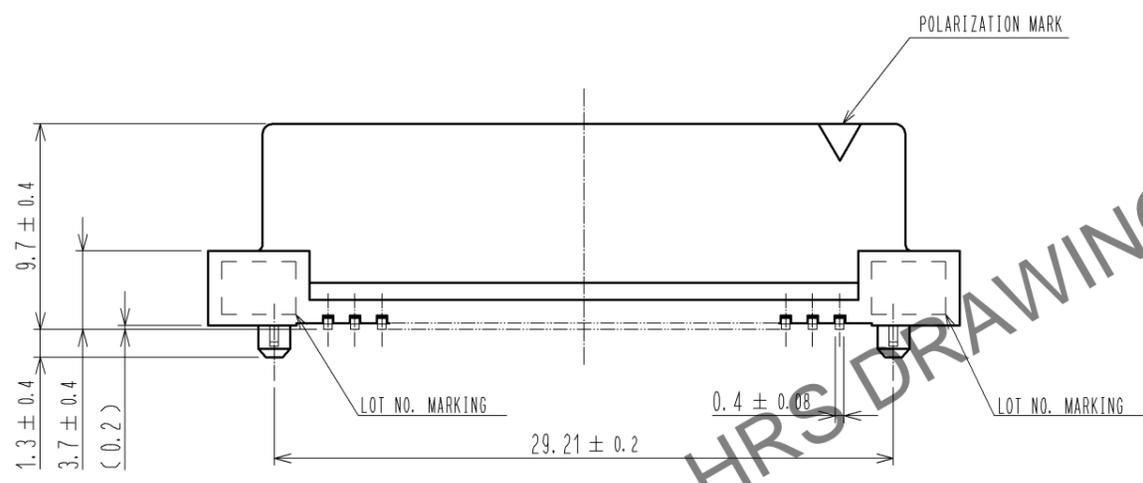


RECOMMENDED LAND PATTERN DIMENSION OF PCB
 (RECOMMENDED METAL MASK THICKNESS : t=0.2mm)

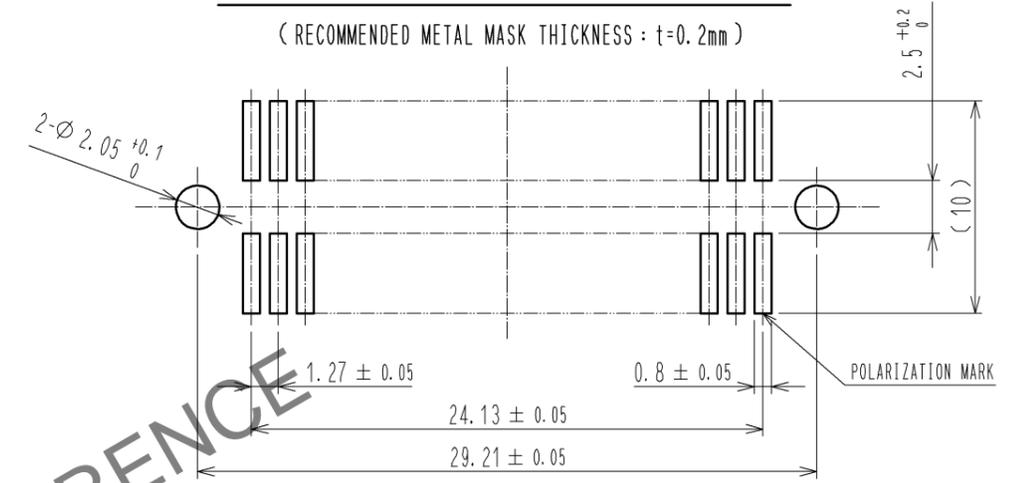

HRS DRAWING FOR REFERENCE


- NOTES 1. LEAD CO-PLANARITY SHALL BE 0.15 MAX.
 2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 3. TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.

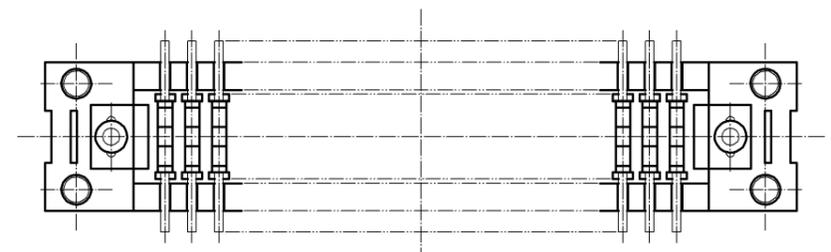


3	PS	TRAY	4	PI	TAPE FOR VACUUM PICKUP
1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHER BRONZE	CONTACT AREA : GOLD 0.2μm min LEAD AREA : TIN-PLATING 2μm min UNDER PLATING : NICKEL 1.5μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 3 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 13.07.30	DESIGNED		DATE
		CHECKED : HT. YAMAGUCHI 13.07.30	DRAWING NO.		EDC3-082414-01
		DESIGNED : TY. EDAGAWA 13.07.30	PART NO.		FX2-40S-1.27SV(96)
		DRAWN : TY. EDAGAWA 13.07.30	CODE NO.		CL572-2103-9-96
					1/2

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


DRAWING FOR PACKING(1:2)

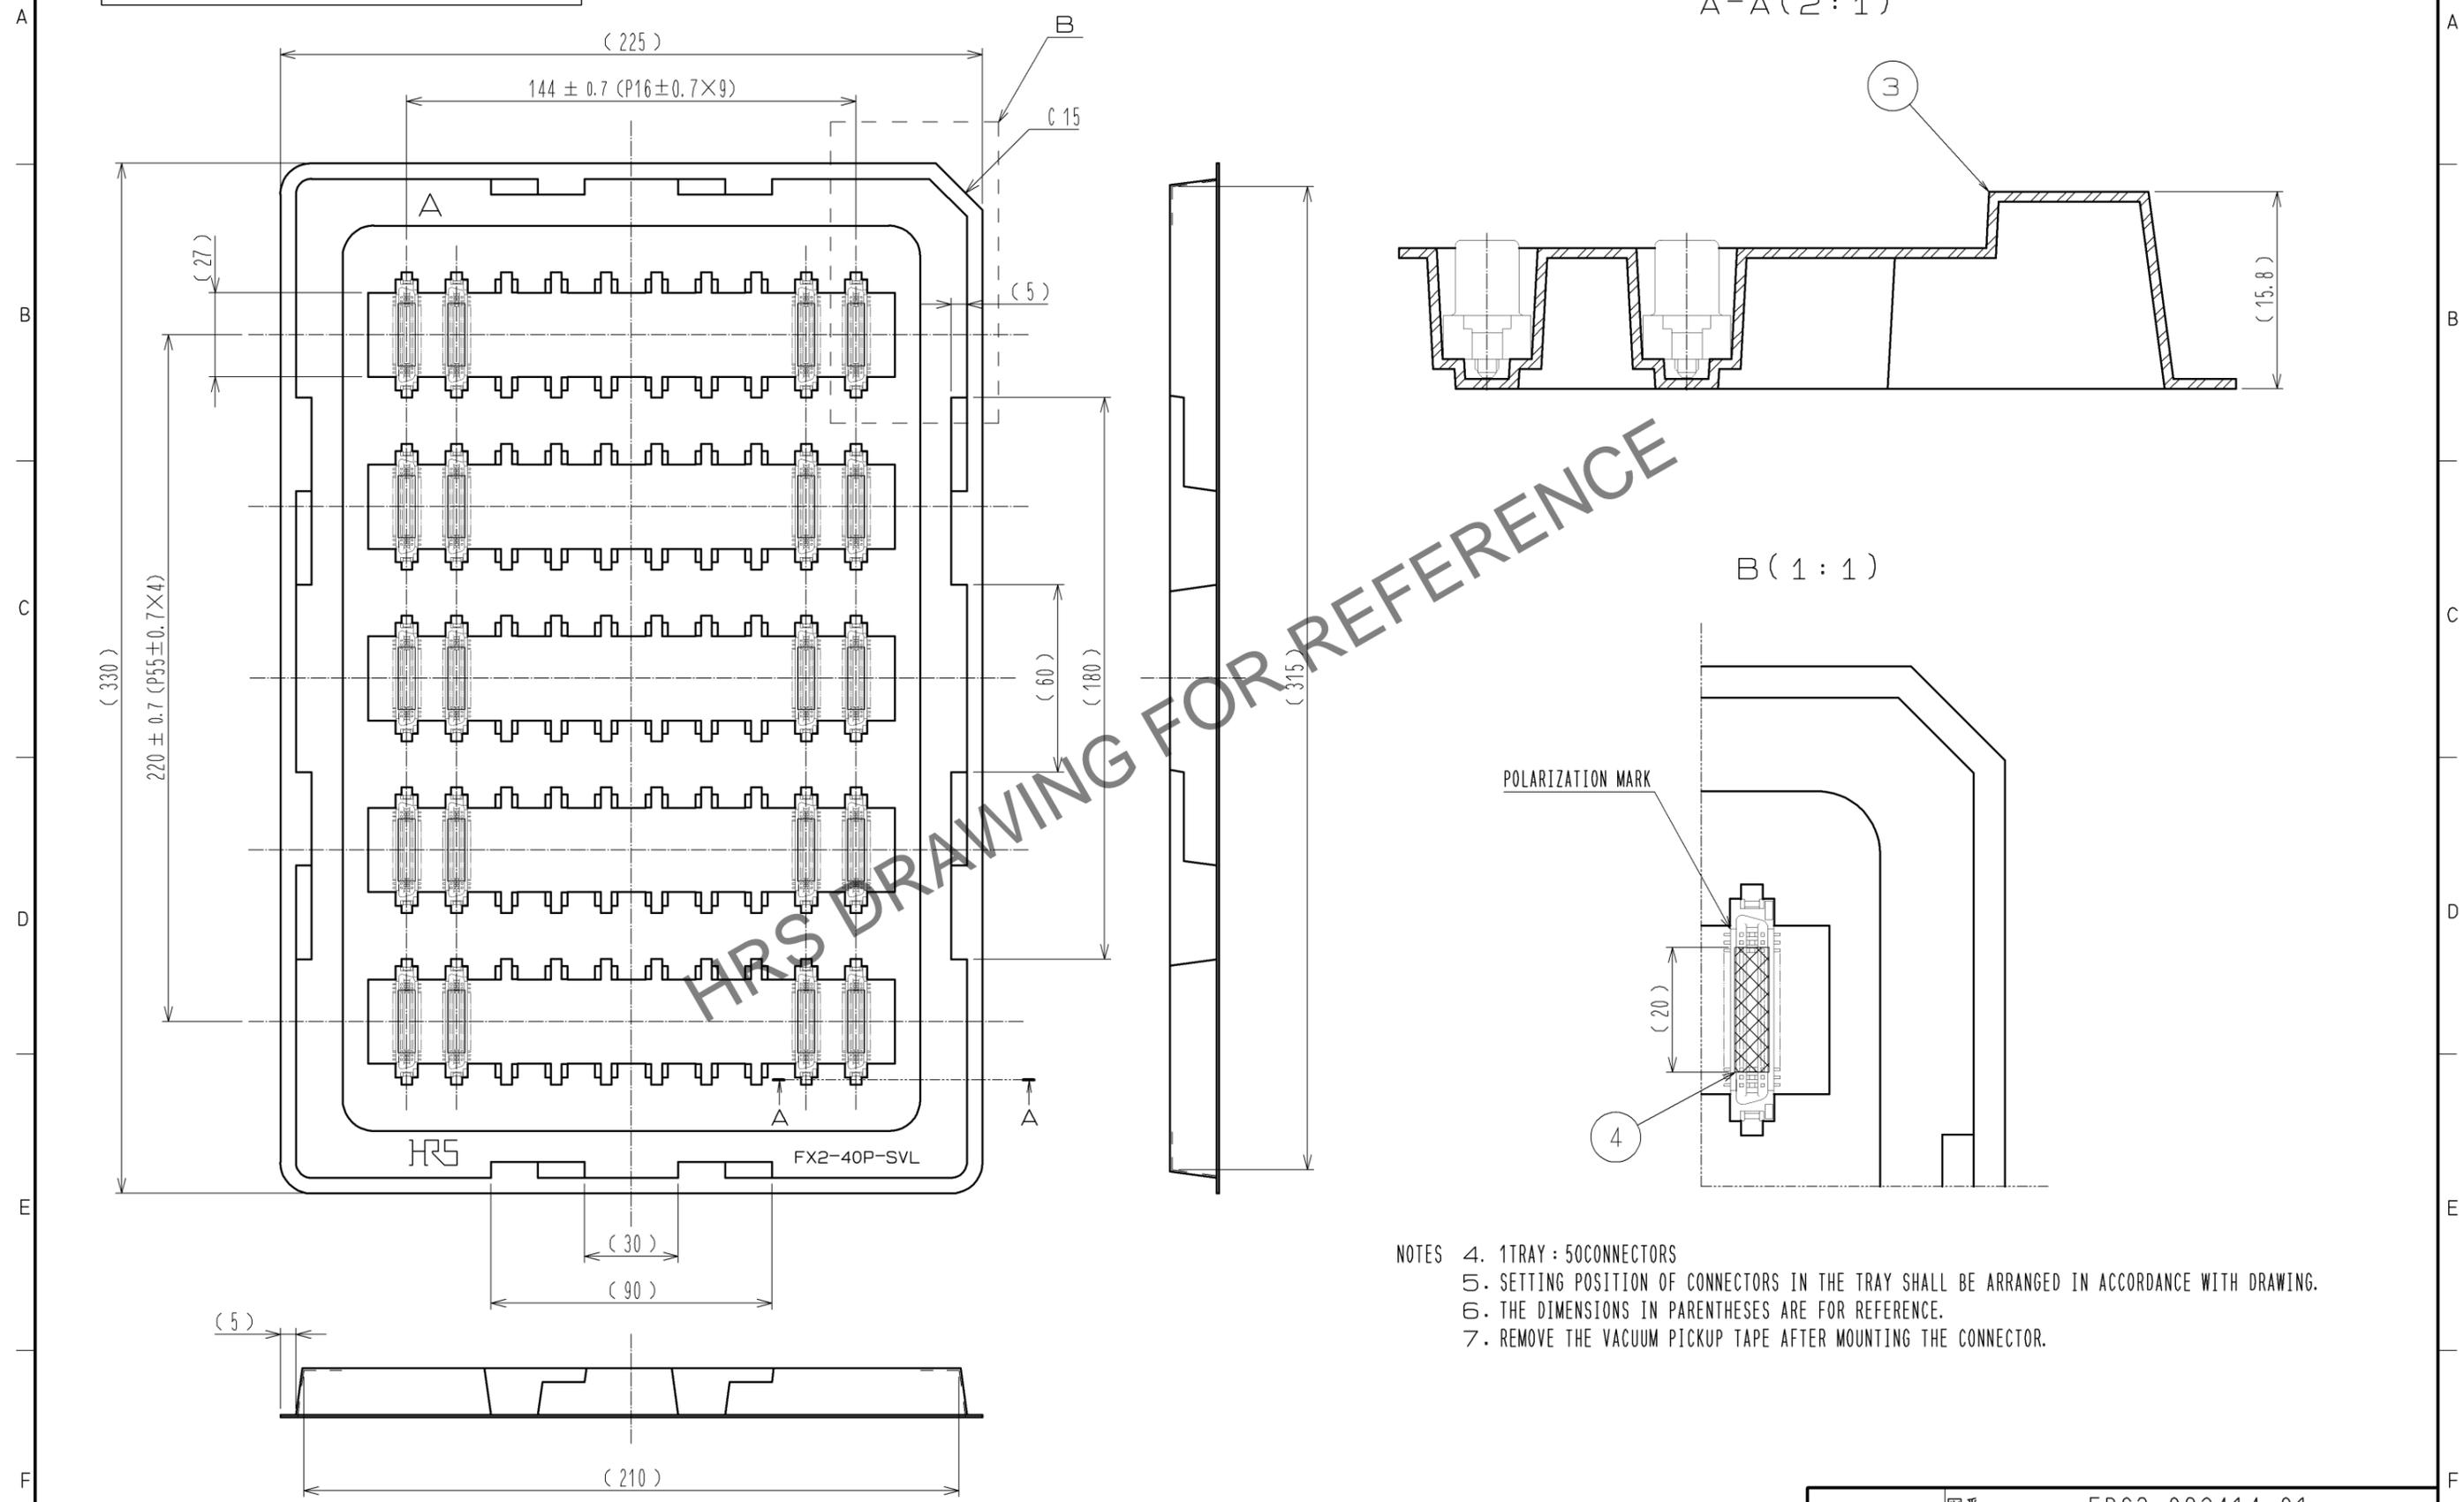

A-A(2:1)

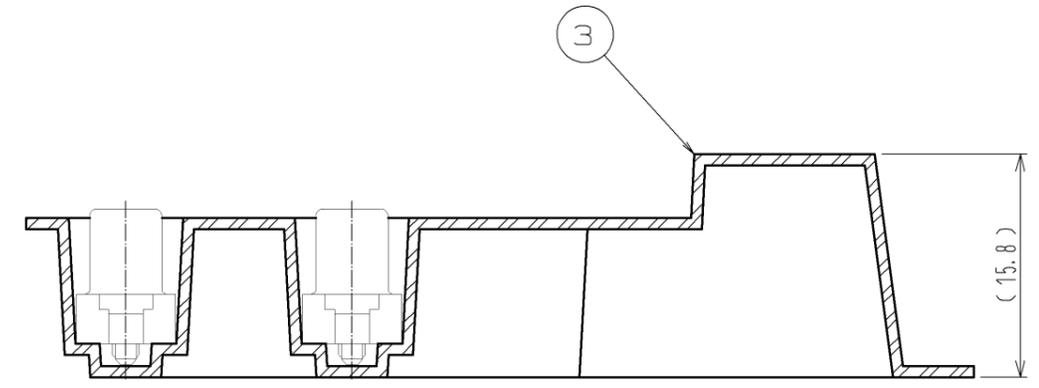

B(1:1)

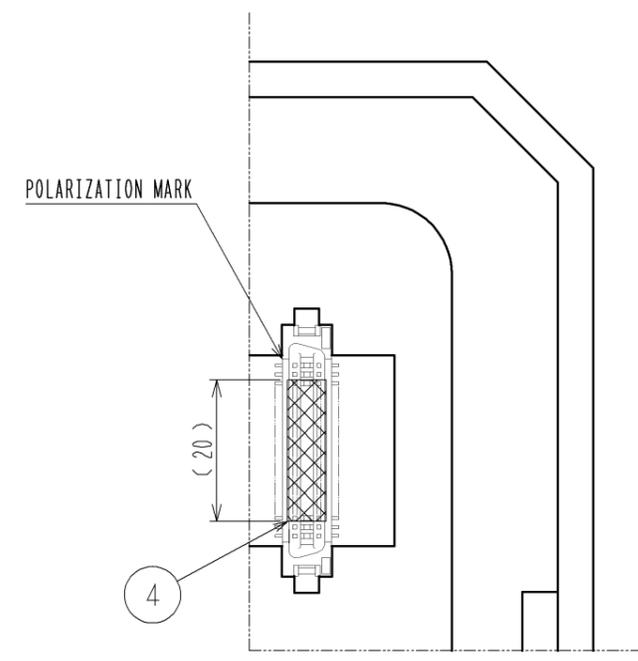

- NOTES
- 4. 1TRAY : 50CONNECTORS
 - 5. SETTING POSITION OF CONNECTORS IN THE TRAY SHALL BE ARRANGED IN ACCORDANCE WITH DRAWING.
 - 6. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 7. REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

HRS	図番:	EDC3-082414-01	△ 2/2
	製品名:	FX2-40S-1.27SV(96)	
	製品コード:	CL572-2103-9-96	