


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

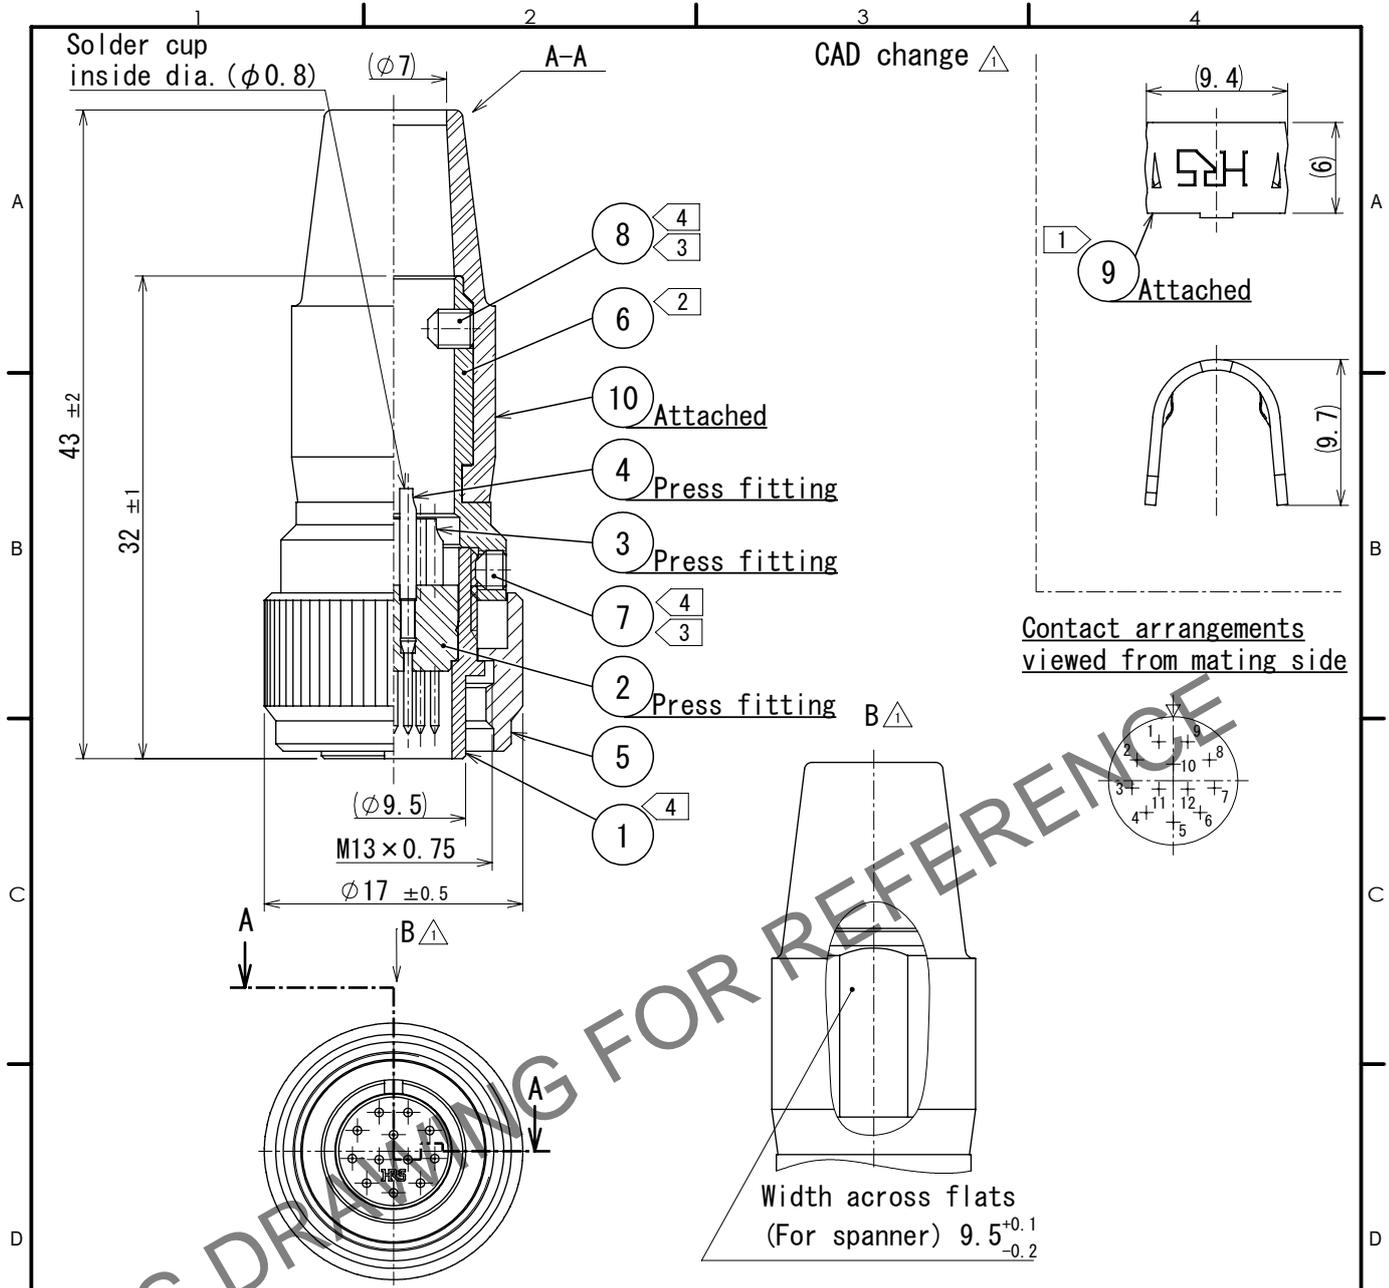

- Notes**
- ① Hand crimping tool. Ref. No. ⑨ : HR10A-TC-02 (CL150-0041-2)
The hole diameter for crimping: $\phi 7.0$
 - ② The recommended clamp torque, Ref. No. ⑥: 2 to 2.5 N · m.
 - ③ Across flats hexagon head of Ref. No. ⑦ and ⑧ : 1.27
The recommended clamp torque, Ref. No. ⑦ and ⑧ : 0.3 to 0.4 N · m.
 - △ ④ Loctite 243 ,Henkel Japan or equivalent apply to prevent Ref. No. ①, ⑦ and ⑧ from loosening.
 - 5 One example of the rotation of Ref. No. ⑥ to Ref. No. ① is shown.
 - △ 6 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - △ 7 The assembly this product applies to the manual ETAD-C0354-00.

5	Brass	Nickel plating	10	Chloroprene rubber	(Black)		
4	Brass	Silver plating 2 μ m min.	9	Brass			
3	Brass	Silver plating 2 μ m min.	8	Steel	Nickel plating Hexagon socket set screw M2.6×0.45×3		
2	Polyamide	(Black) UL94V-0	7	Steel	Nickel plating Hexagon socket set screw M2.6×0.45×2		
1	Brass △	Nickel plating	6	Brass	Nickel plating		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

	HIROSE ELECTRIC CO., LTD.	APPROVED : MO. SATOH 2005. 10. 20	DRAWING NO. EDC-027961-73-73
		CHECKED : EJ. KUNII 2005. 10. 20	
DESIGNED : DS. MATSUNE 2005. 10. 19	CODE NO. CL0110-0432-0-73		
DRAWN : DS. MATSUNE 2005. 10. 19		1/1	