


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

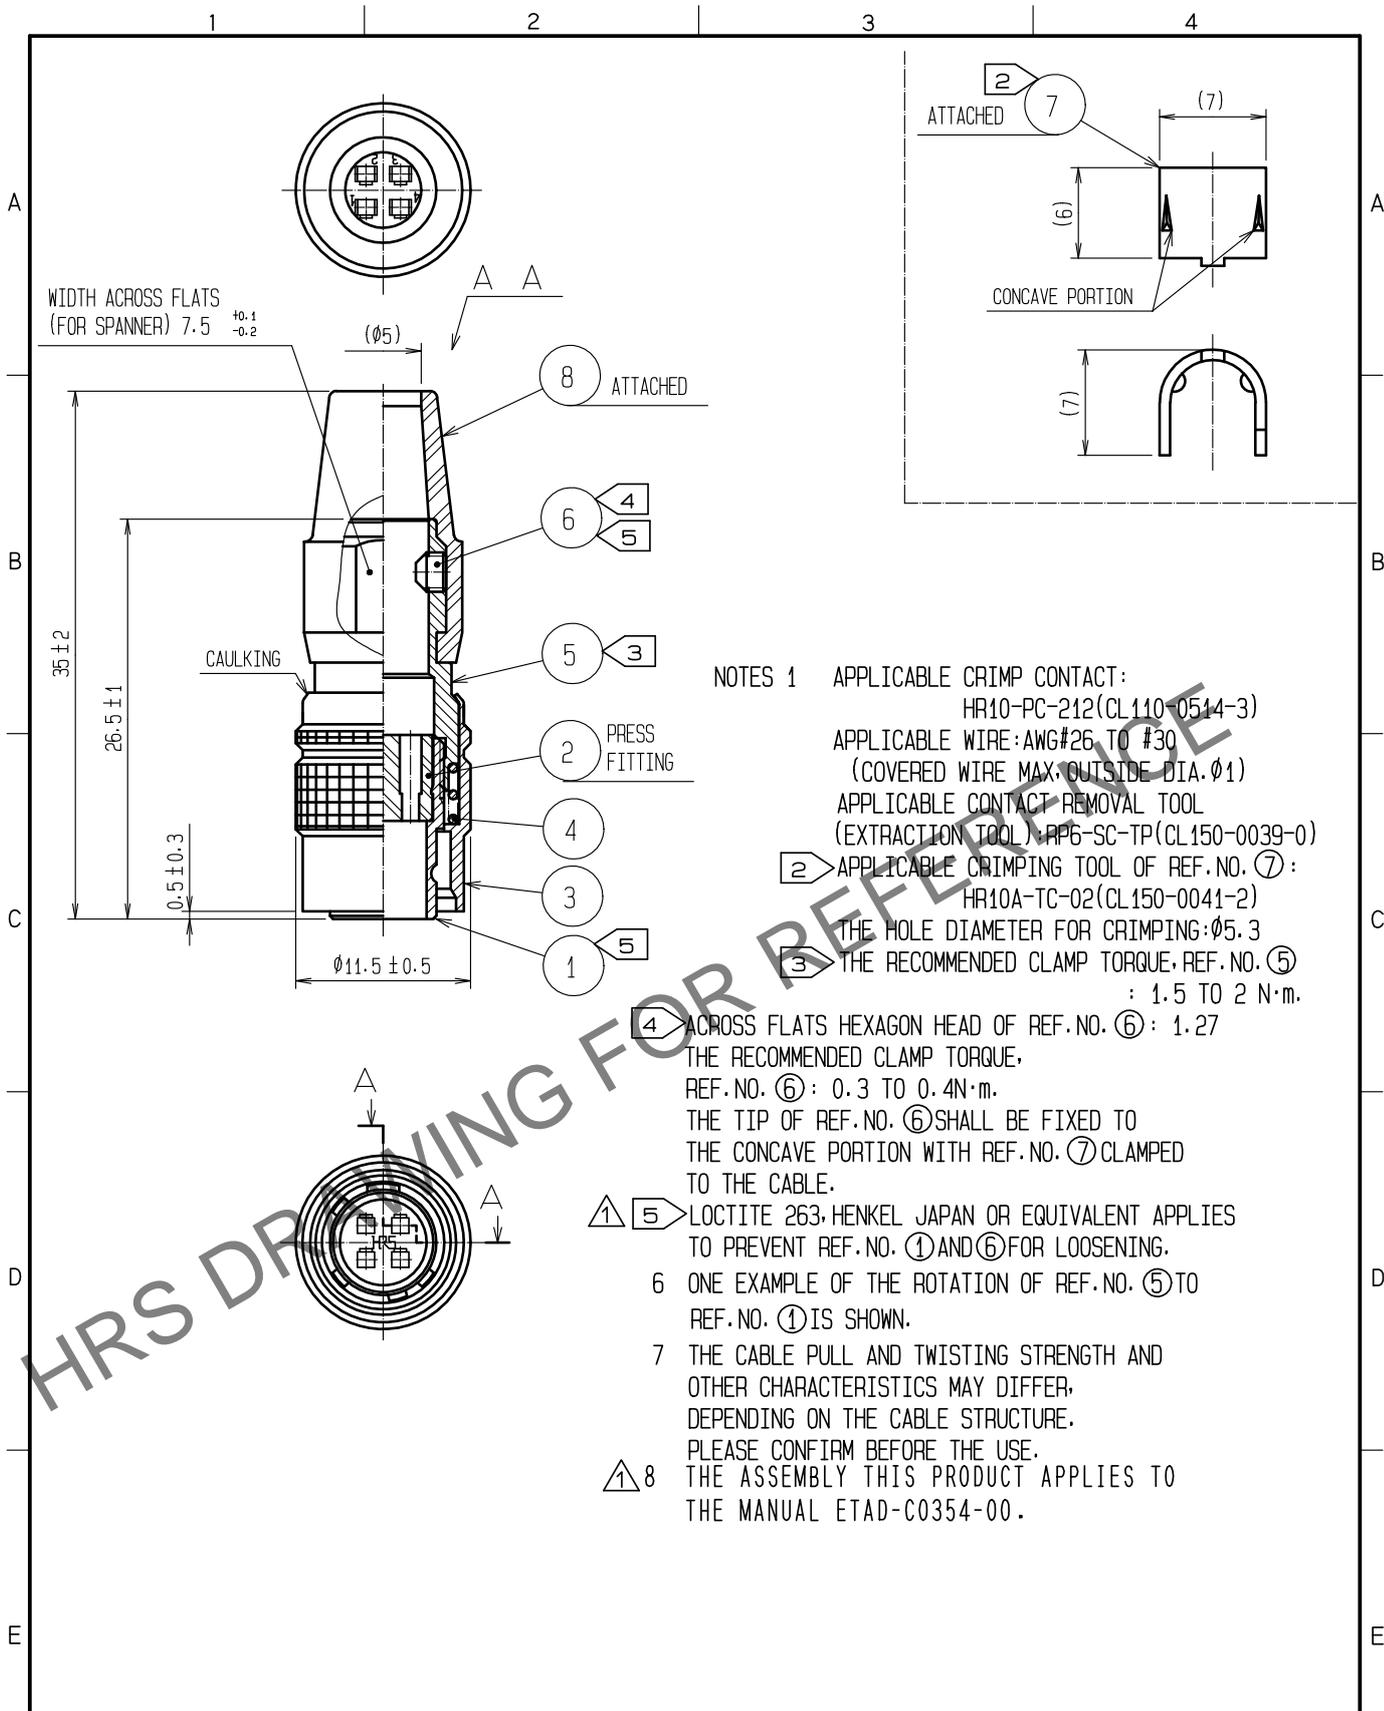

NOTES 1 APPLICABLE CRIMP CONTACT:
HR10-PC-212(CL110-0514-3)
APPLICABLE WIRE:AWG#26 TO #30
(COVERED WIRE MAX. OUTSIDE DIA.Ø1)
APPLICABLE CONTACT REMOVAL TOOL
(EXTRACTION TOOL):RP6-SC-TP(CL150-0039-0)
② APPLICABLE CRIMPING TOOL OF REF.NO. ⑦:
HR10A-TC-02(CL150-0041-2)
THE HOLE DIAMETER FOR CRIMPING:Ø5.3
③ THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑤
: 1.5 TO 2 N·m.
④ ACROSS FLATS HEXAGON HEAD OF REF.NO. ⑥ : 1.27
THE RECOMMENDED CLAMP TORQUE,
REF.NO. ⑥ : 0.3 TO 0.4N·m.
THE TIP OF REF.NO. ⑥ SHALL BE FIXED TO
THE CONCAVE PORTION WITH REF.NO. ⑦ CLAMPED
TO THE CABLE.
① ⑤ LOCTITE 263, HENKEL JAPAN OR EQUIVALENT APPLIES
TO PREVENT REF.NO. ① AND ⑥ FOR LOOSENING.
6 ONE EXAMPLE OF THE ROTATION OF REF.NO. ⑤ TO
REF.NO. ① IS SHOWN.
7 THE CABLE PULL AND TWISTING STRENGTH AND
OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.
① 8 THE ASSEMBLY THIS PRODUCT APPLIES TO
THE MANUAL ETAD-C0354-00.

4	STEEL	NICKEL PLATING	8	CHLOROPRENE RUBBER	(BLACK)
3	BRASS	MATTE FINISH NICKEL PLATED	7	BRASS	
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	6	STEEL	NICKEL PLATING M2.6X0.45X2
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ① 2	DESCRIPTION OF REVISIONS DIS-C-00017346	DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20240508
HIROSE ELECTRIC CO., LTD.	APPROVED :MO. SATOH	20070308	DRAWING NO.	EDC4-021659-73			
	CHECKED :EJ. KUNII	20070308	PART NO.	HR10A-7P-4PC(73)			
	DESIGNED :TO. HORII	20070308	CODE NO.	CL0110-0501-1-73			
	DRAWN :MK. SATO	20070308		① 1/1			