


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

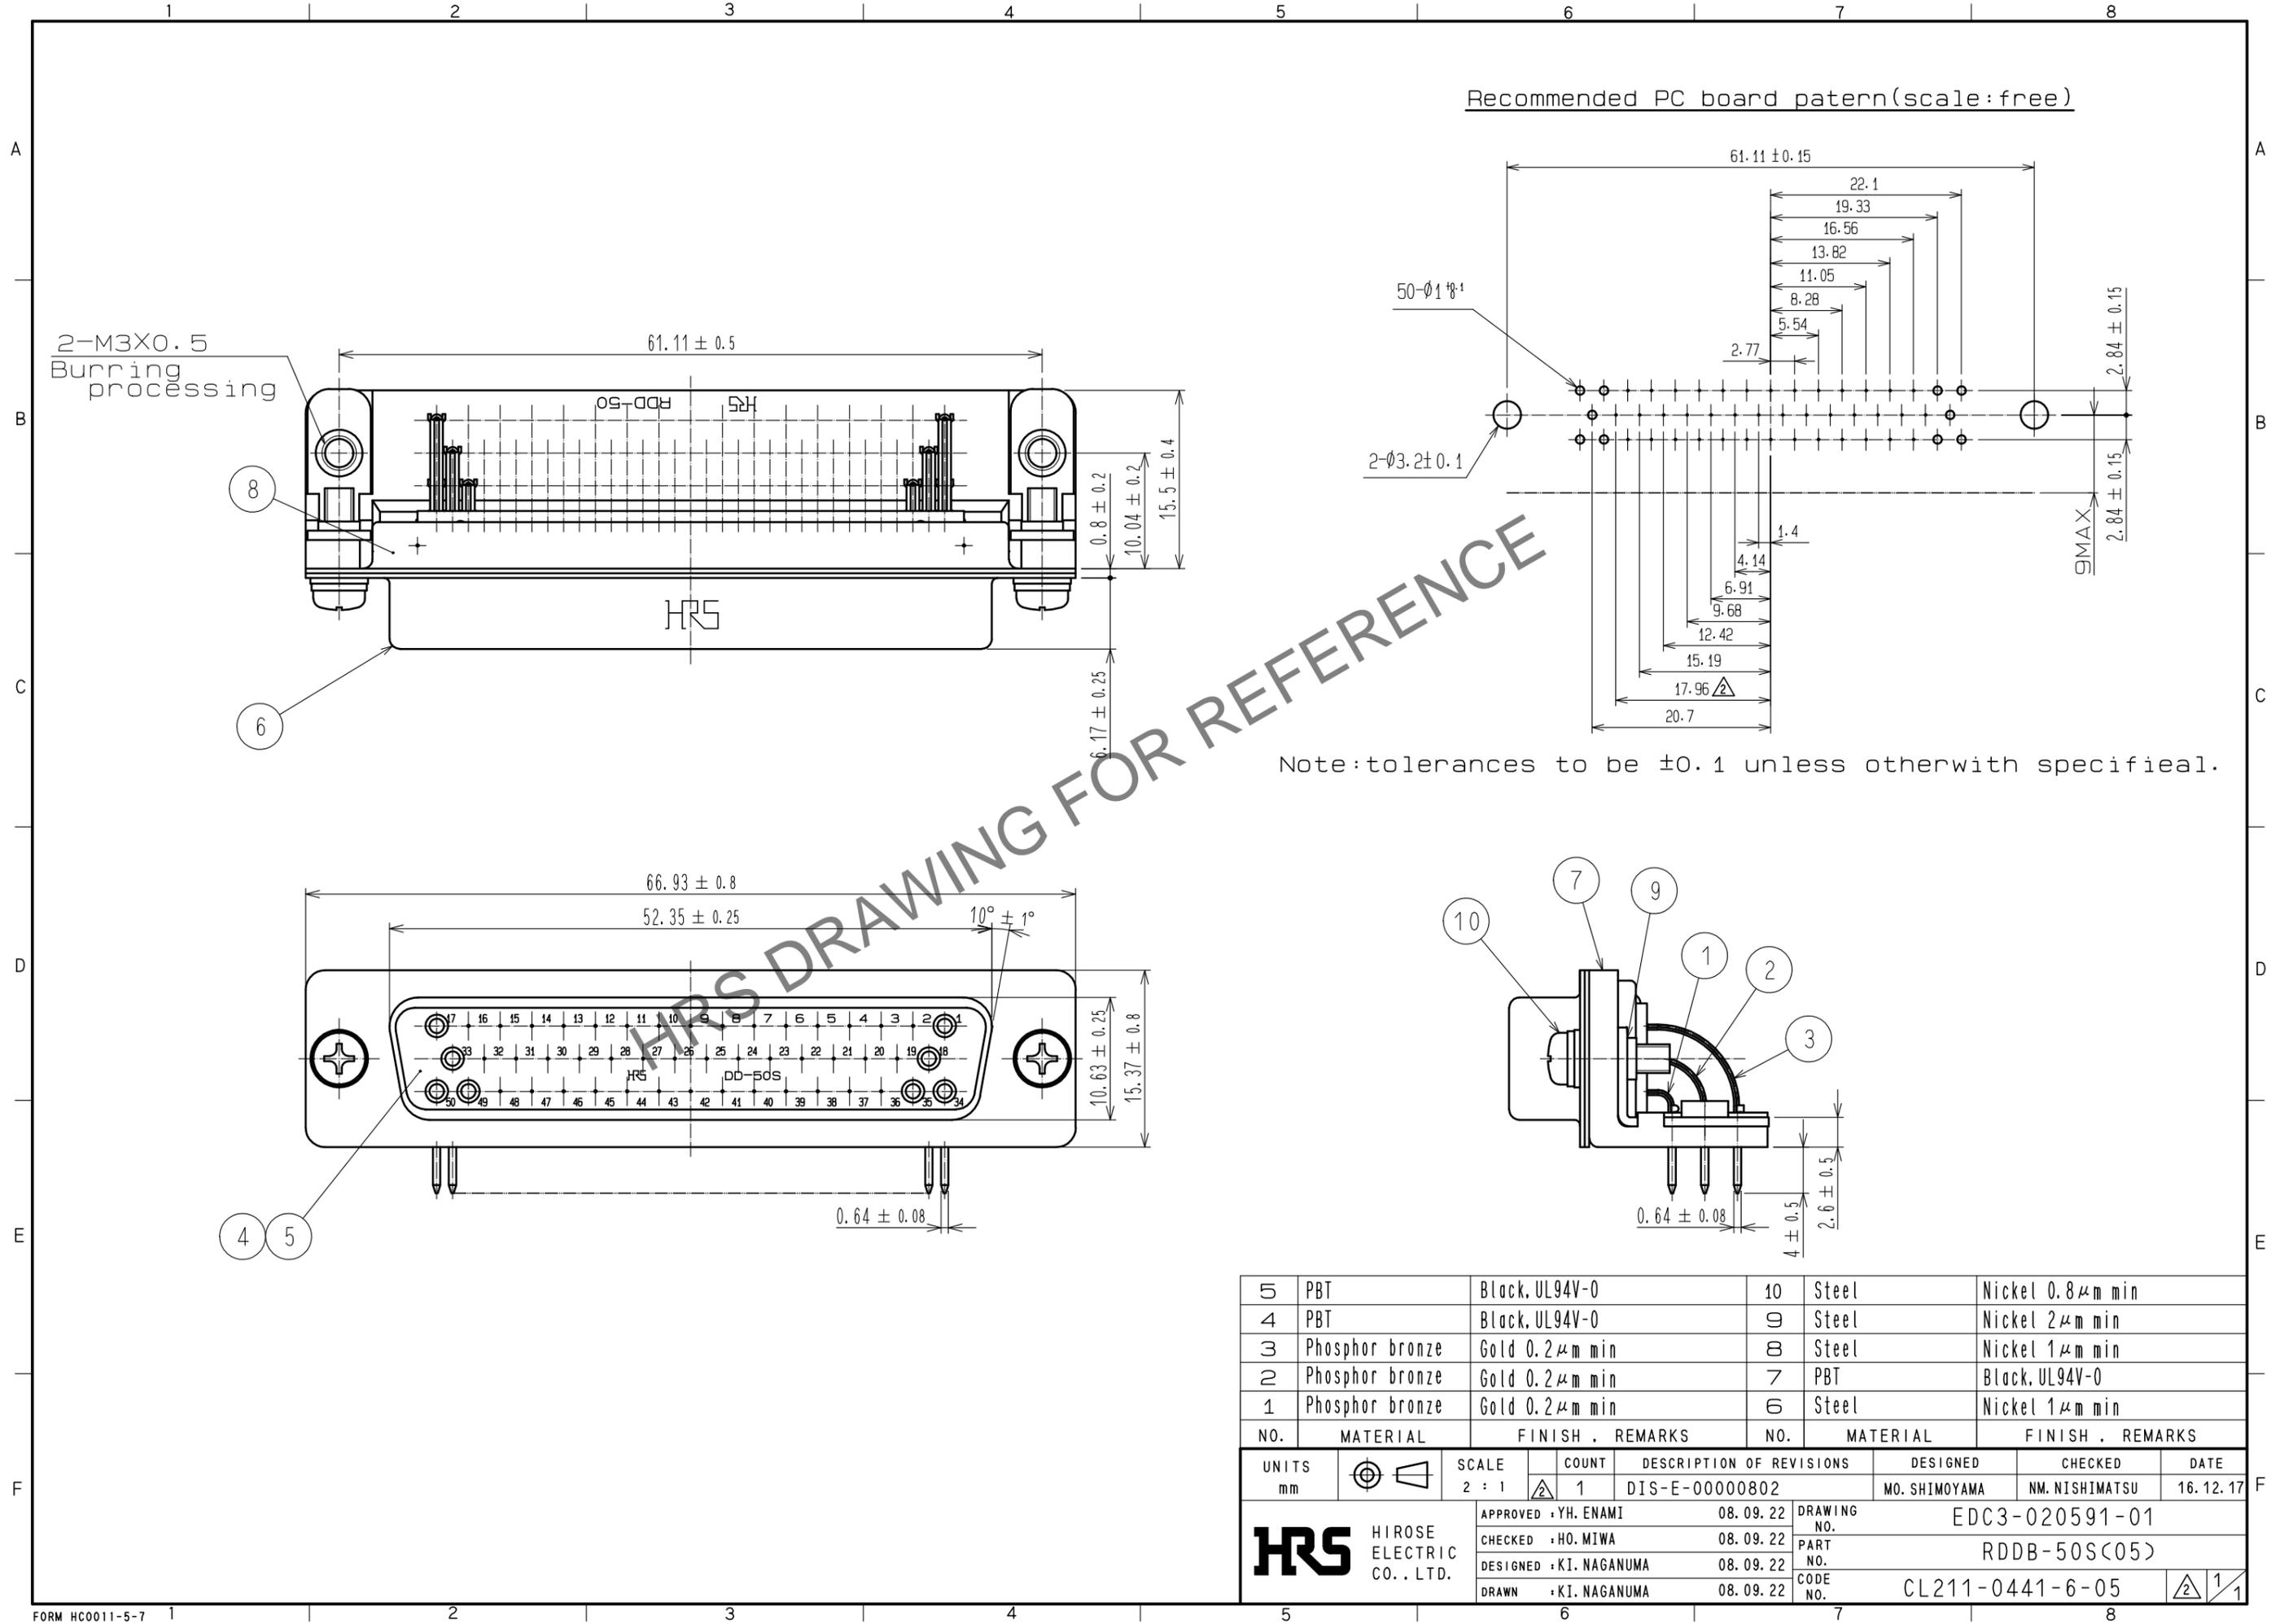

Note: tolerances to be ± 0.1 unless otherwith specificial.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	PBT	Black, UL94V-0	10	Steel	Nickel 0.8 μ m min
4	PBT	Black, UL94V-0	9	Steel	Nickel 2 μ m min
3	Phosphor bronze	Gold 0.2 μ m min	8	Steel	Nickel 1 μ m min
2	Phosphor bronze	Gold 0.2 μ m min	7	PBT	Black, UL94V-0
1	Phosphor bronze	Gold 0.2 μ m min	6	Steel	Nickel 1 μ m min

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1	DIS-E-00000802	MO. SHIMOYAMA	NM. NISHIMATSU	16.12.17

APPROVED	DATE	DRAWING NO.
YH. ENAMI	08.09.22	EDC3-020591-01
CHECKED	DATE	PART NO.
HO. MIWA	08.09.22	RDDB-50S(05)
DESIGNED	DATE	CODE NO.
KI. NAGANUMA	08.09.22	CL211-0441-6-05
DRAWN	DATE	
KI. NAGANUMA	08.09.22	